

SILKUT COMPOUND 1000

Paste for severe tapping applications

Description

SILKUT COMPOUND 1000 is a soft paste and contains a high proportion of fatty and extreme pressure additives together with a solid lubricant. This product may stain cuprous and some other non-ferrous materials.

Application


It is primarily intended for use on medium and high tensile steels where the lubricant is applied by dipping or brushing the tap. It is particularly recommended for the more severe operations on fine threads.

Advantages/Benefits

- Possesses a high EP capability
- It can be readily removed by paraffin or other hydrocarbon solvents

Component Protection

Following manufacturing operations Fuchs recommends the use of our fully compatible RENOCLEAN cleaners and ANTICORIT corrosion preventives to clean and protect your components. Please refer to data sheets, or contact your local Fuchs Area Manager to discuss your requirements.

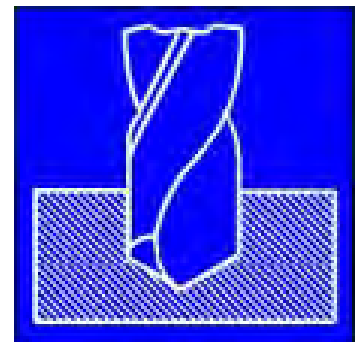

May 2009 GDUK Page 1 of 2

CHARACTERISTICS: SILKUT COMPOUND 1000

Characteristics	Unit	Test Method	
Appearance		Firm yellow/green paste	
Odour characteristics		Lanolin	
Sap matter	%wt	35.0	IP284
Reactive sulphur	%wt	10.0	IP155
Sulphated ash	%wt	15.0	IP163
Fillers	%	25.0	(DEF 2000 No.13)